

L5361

Sand Louver Formed Steel



APPLICATION

The L5361 is a 4", stationary, formed steel sand louver. It has a sand efficiency removal of appx. 90% during testing as described in ASHRAE Standard 52-76 and an architecturally pleasing appearance.


STANDARD CONSTRUCTION

Frame	4" (102) deep, 18 gage (1.3) formed galvanized steel channel.
Blades	18 gage (1.3) formed galvanized steel.
Screen	1/2" (13) mesh x 19 gage (1.1) galvanized screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.
Finish	Mill.
Minimum Size	24"w x 24"h (610 x 610).
Approximate Shipping Weight	7 lbs. per sq. ft. (34 kg/m ²).
Maximum Factory Assembly Size	Shall not exceed 90" x 60" (2286 x 1524) or 60" x 90" (1524 x 2286) per section. Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

Consult Ruskin for additional information.

FEATURES

- ▶ 25% Free Area, 48" x 48" (1219 x 1219) size.
- ▶ Low pressure drop, tested in accordance with AMCA Standard 500-L.
- ▶ Sand efficiency removal of approximately 90% measured during tests described in ASHRAE Standard 52-76 test method.
- ▶ Sightproof design.

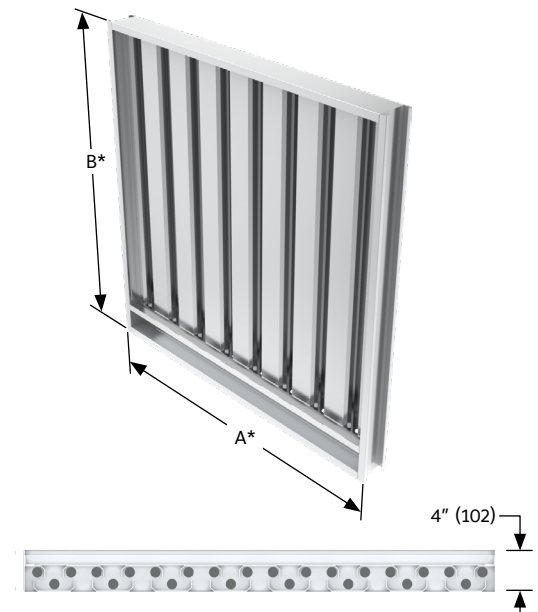

YEAR LIMITED WARRANTY ISO9001 CERTIFIED

VARIATIONS

Variations to the basic design of the louver are available at additional cost. They include:

- ▶ Filter racks.
- ▶ A variety of bird and insect screens.
- ▶ Optional finishes available at additional cost. Please see [Paint Finishes and Color Guide](#) and [Finish Type Model Chart](#) for more details. Contact louversales@ruskin.com with questions
- ▶ Formed aluminum construction with .080" (2) nominal wall thickness frame and blades.
- ▶ Formed stainless steel construction with 18 gage (1.3) frame and blades.

Consult Ruskin for other special requirements.

NOTES:


- Dimensions in inches, parenthesis () indicate millimeters.
- Units can be furnished actual size or with size deducts.

PERFORMANCE DATA


AMCA Standard 500-L provides a reasonable basis for testing and rating louvers. Testing to AMCA 500-L is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate.

Designs should provide a reasonable safety factor for louver performance by selecting at some point below pressure drop or sand removal requirements.

SAND REMOVAL EFFICIENCY

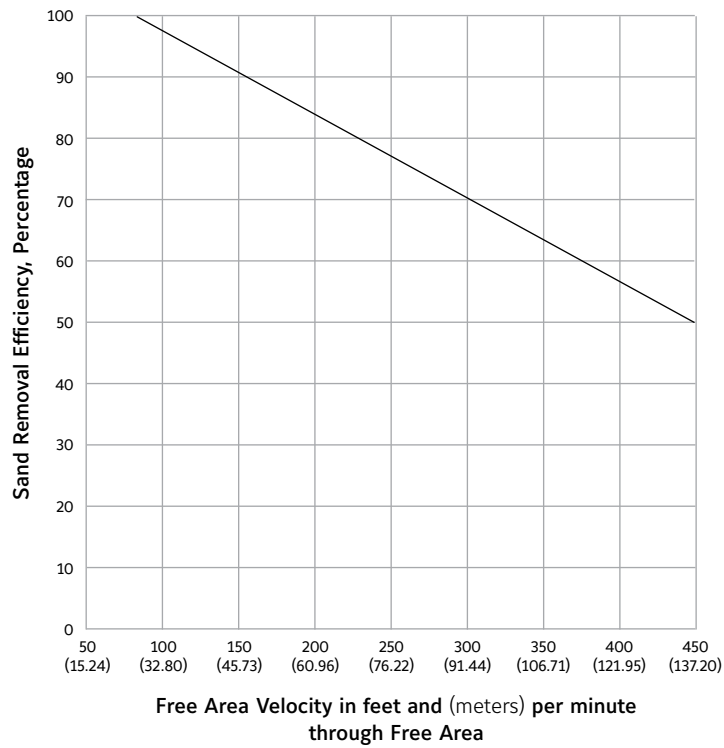

PRESSURE DROP

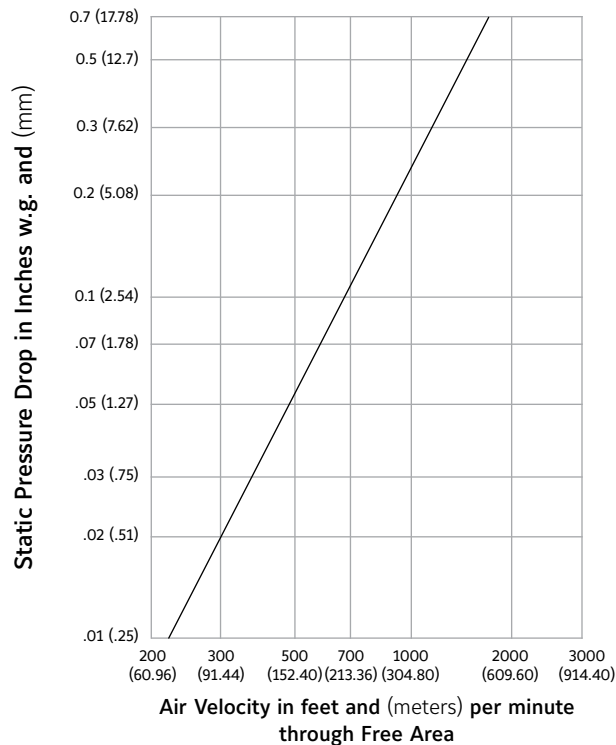

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be Ruskin Model L5361 Vertical Blade Sand Louver, 4" (102) deep. Louver components (heads, jambs, sills, blades & mullions) shall be 18 gage (1.3) galvanized steel welded construction. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. per sq. ft. (1.44kPa) (equivalent of a 110 mph (177 KPH) wind - specifier may substitute any loading required).

Published louver performance data for pressure drop shall be tested in accordance with AMCA 500-L and achieve a maximum pressure drop of .125" (3.2) w.g. at a free area velocity of 750 FPM (228.6 m/min.).

Published louver performance data for measuring quantities of test dust mst be provided using a dust feeder built to specification described in ASHRAE Standard 52-76. Test dust used shall be 140-200 micron size obtained by sieving AC test dust coarse.

Published information for pressure drop and dust infiltration performance must be submitted for approval prior to fabrication and must demonstrate performance equal to or better than Ruskin model specified.

LINKS TO IMPORTANT DOCUMENTS

Document Title
Paint Finishes and Color Guide
Limited Warranty Document



3900 Doctor Greaves Road
Grandview, MO 64030
Website: www.ruskin.com
Phone: (816) 761-7476