

# EME6625D LOUVER

## Installation Details


Miami-Dade Approved | Miami Dade NOA# 23-1116.05

Florida Product Approved FL-21829.15



### INSTALLATION

1. Place installation channels over the perimeter of the opening.
2. Slide louver(s) into channels from the front.
3. Expand installation channels in opening as much as possible using shims or wedges between the front of the louver frames and installation channels.
4. When installation channels are tight against the perimeter of the opening, install 1/4" (6) screws through the installation channel attachment angles into the rear of the louver frames on all sides.
5. Remove shims and caulk front of louver.

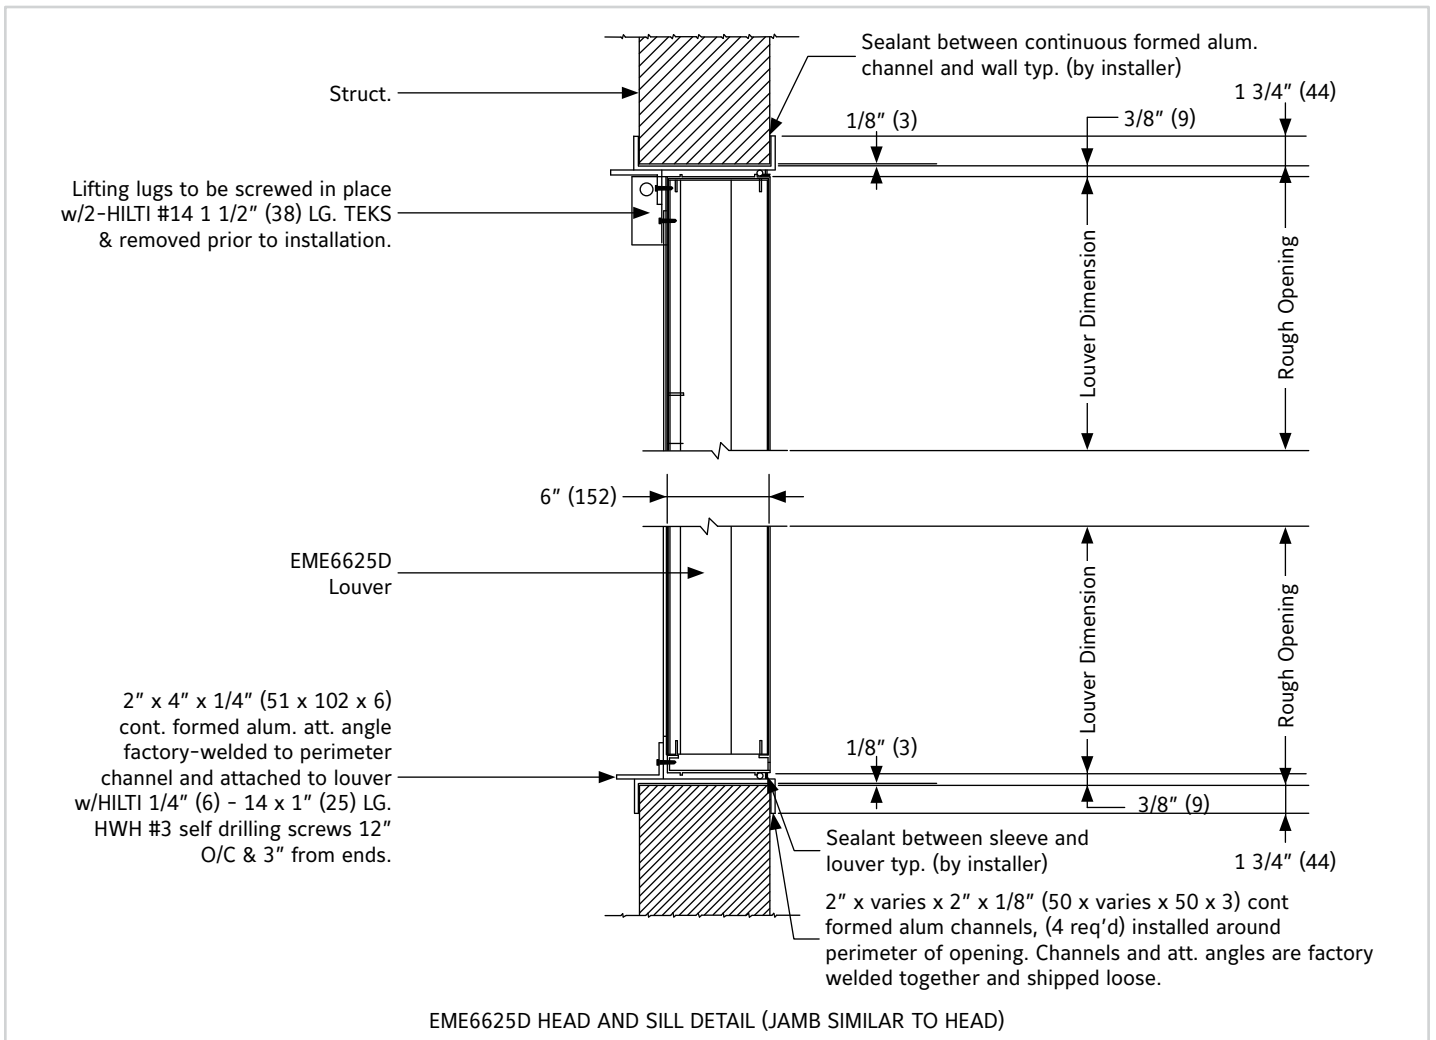

#### NOTES:

1. The installation method indicated must be complied with for Miami-Dade Approval. It is the responsibility of the installing contractor to properly install the louvers per this detail.
2. On special orders, Ruskin may provide submittal and/or shop drawings. Reference these drawings for additional installation information.
3. Louvers wider than the maximum single section width will be shipped in multiple sections and will require field assembly. Field assembly is not by Ruskin.
4. Installation channels are shipped loose.
5. Reference Installation Instruction II-EMEDCD50-207 for EME6625D/CD50 installation.

#### LINKS TO IMPORTANT DOCUMENTS

##### Document Title

Limited Warranty Document



3900 Doctor Greaves Road  
Grandview, MO 64030  
Website: [www.ruskin.com](http://www.ruskin.com)  
Phone: (816) 761-7476