

SSRTH RECTANGULAR TUBE BLADE SUNSHADE HORIZONTALLY MOUNTED

STANDARD CONSTRUCTION

BLADES

6063T5 extruded aluminum rectangular tubes.
 SSRTH4 - 1³/₄" x 4" x .125" (44 x 102 x 3.2) installed at 45° angle and 4¹/₂" (114) center-to-center spacing.
 SSRTH6 - 2" x 6" x .125" (51 x 152 x 3.2) installed at 45° and 6" (152) center-to-center spacing.

OUTRIGGERS

6" wide x .375" thick (152 x 10) flat, non-tapered aluminum rectangle. Other outrigger designs are available at additional cost.

FASCIA

Available at additional cost.

INSTALLATION

Installation brackets and hardware by others.

CONSTRUCTION

All welded.

FINISH

Mill.

MINIMUM SIZE

12"w x 12"h (305 x 305).

APPROXIMATE SHIPPING WEIGHT



6 lbs. per sq. ft. (29 kg/m²).

MAXIMUM SINGLE SECTION SIZE

Consult factory.

OVERALL

Single sections may be joined together in the field for unlimited overall size. Field assembly and supporting structure are by others.

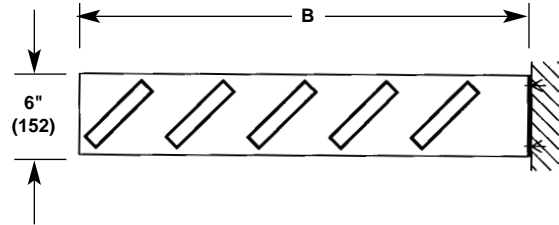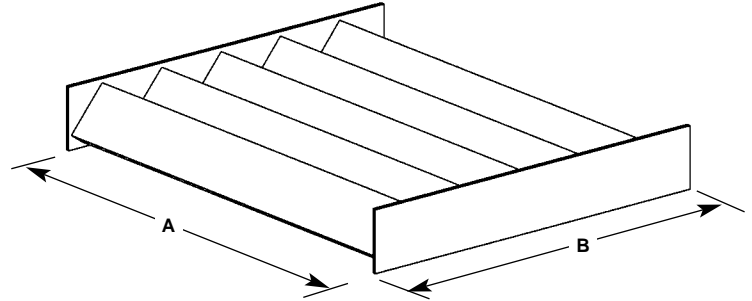

VARIATIONS

- Alternate blade spacing.
- Alternate blade installation angles.
- Outrigger Options: tapered bar, channel and tube.
- Fascia Options: channel, round and bullnose shapes.
- Installation brackets and hardware are available.
- Selection of finishes: baked enamel (modified fluoropolymer), Kynar, Pearledize 50 & 70, prime coat, clear and color anodize. (Some variation in anodize color consistency is possible.)

All variations are available at additional cost. Consult Ruskin for other special requirements.

Dimensions shown in parentheses () indicate millimeters.

| TAG | QTY. | MODEL | SIZE | | VARIATIONS |
|----------------|------|-------|------------|----------|------------|
| | | | A - WIDE | B - HIGH | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| PROJECT | | | LOCATION | | |
| ARCH./ENGR. | | | CONTRACTOR | | |
| REPRESENTATIVE | | | DATE | | |